

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 January 2001 (25.01.2001)

PCT

(10) International Publication Number
WO 01/05282 A1

(51) International Patent Classification⁷: A47G 1/06

(21) International Application Number: PCT/IB00/00941

(22) International Filing Date: 12 July 2000 (12.07.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
99/4662 20 July 1999 (20.07.1999) ZA
99/7273 23 November 1999 (23.11.1999) ZA

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and

(72) Inventor: POGGIOLINI, Marcello [ZA/ZA]; 107 Wildevy Avenue, Lynnwood Manor, 0081 Pretoria (ZA).


Published:

— With international search report.

(74) Agent: VIVIER, Garth; Adams & Adams Place, 1140 Prospect Street, Hatfield, 0083 Pretoria (ZA).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DEVICE FOR FRAMING AN ARTICLE

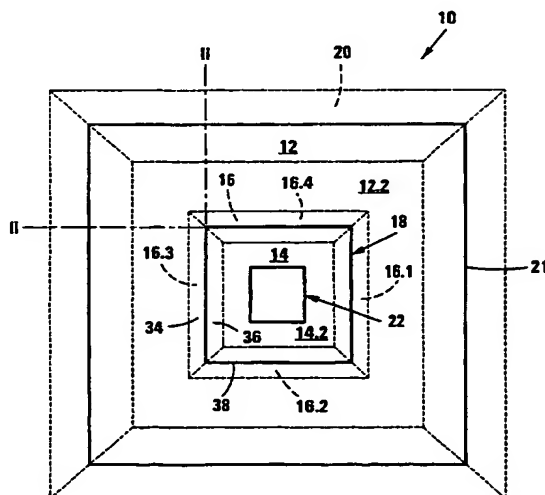

(57) Abstract: A device (10) is provided for framing an article. The device includes inner (16) and outer (20) frame components, an outer panel (12) and transparent sheet material (21). The outer panel (12) includes a rear side and a viewer side and defines an aperture (18) and the outer panel (12) is mounted within the outer frame component (20). The inner frame component (16) is arranged to be seated in the aperture (18) so that it overlaps with a peripheral region of the viewer side and the article is mounted within the inner frame component (16). The transparent sheet material (21) is mounted to a frame component and covers the article. The inner frame component (16) includes an outer abutment surface which overlaps the peripheral region of the viewer side of the outer panel (12) which defines the aperture (18) thereby to conceal a peripheral edge of the aperture. The invention extends to an inner frame component (16) and to a method of assembling a picture frame.

WO 01/05282 A1